



Quick pipe



Quick pipe

The Quick pipe system combines the benefits of cable ducts and conventional electrical installation pipes to produce a single, intelligent system for surface-mounted installations.

- 4 sizes – M16-M32
- Two colours: White and grey
- Simple installation
- Retroinstallation possible
- VDE-approved




Cables are inserted in the open Quick pipe electrical installation pipes in the same way as with open cable ducting.



After the cable has been laid the Quick pipe is turned in the Quick clip, and thereby closed tightly.



Retro-fittings are also possible because the Quick pipe can be opened easily by turning it.

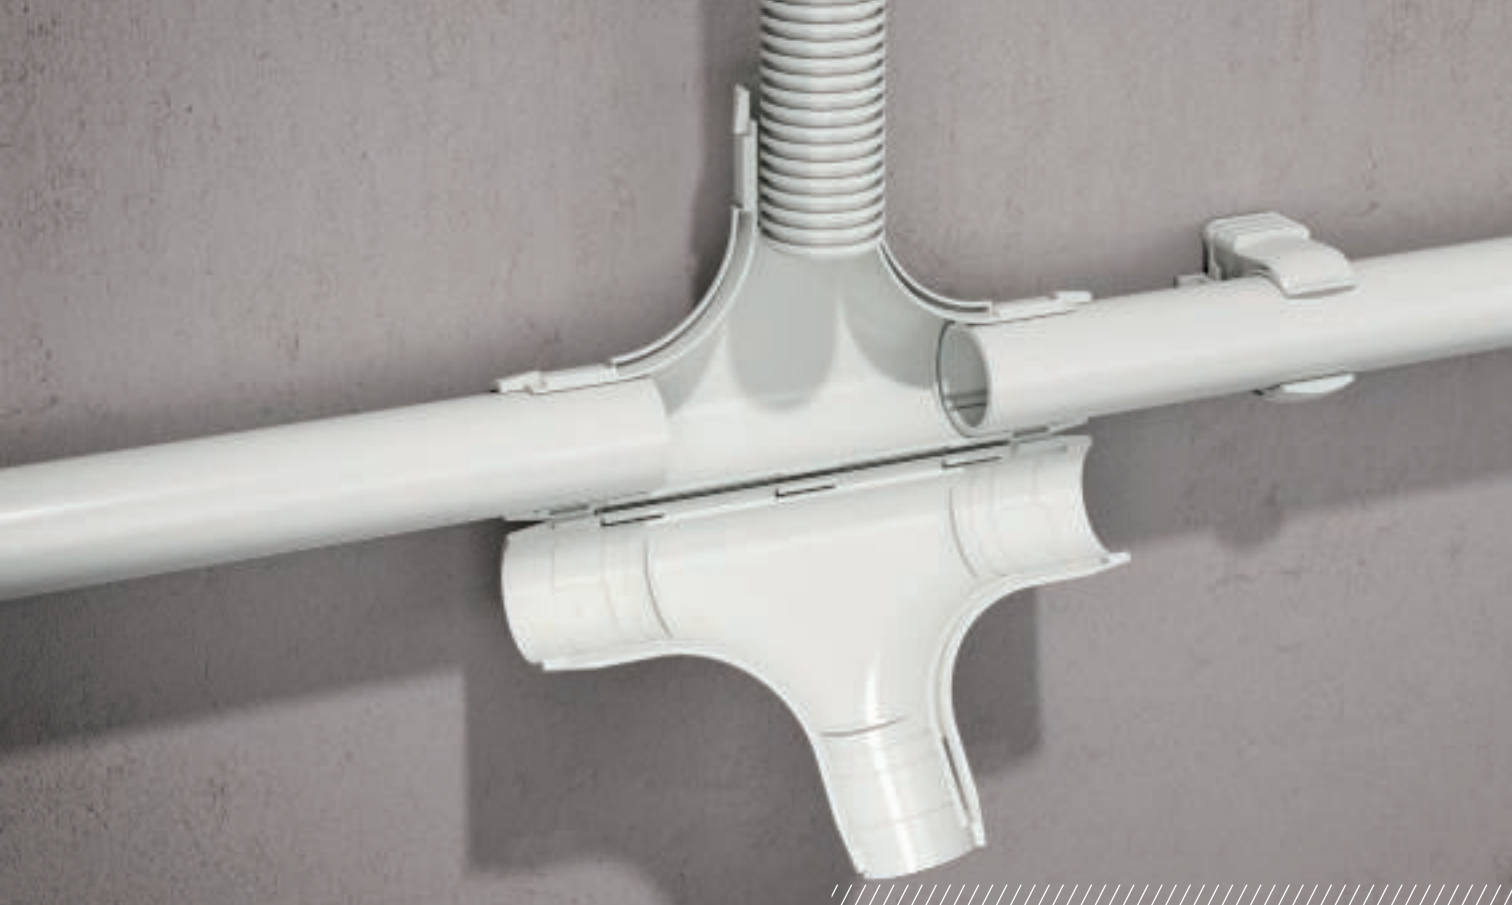

Quick pipe system fittings

The Quick pipe system is ideal for rapid installations. Perfectly matched fittings, which can be opened and closed again without tools, complete the system. They can accept both Quick pipe electrical installation pipes and also corrugated pipes.

The optimised hinge offers particularly rapid installation. It consists of just a single component that can easily be opened. This means that it can be opened and closed any number of times, providing more flexibility, even during retroinstallations.



Advantages at a glance:

- Available in the sizes M16, M20, M25 and M32
- Can be used in the temperature range -25 to $+60^{\circ}\text{C}$
- Manufactured from halogen-free material



Quick pipe T piece

T branches are no longer an obstacle: Simply attach them, open them and you're done.



90° Quick pipe bend

Ideal for internal and external corner installations: The 90° Quick pipe bend.



Quick pipe connecting sleeve

Ensures a reliable connection of Quick pipe electrical installation pipes.

OBO Quick series

Arrangeable cable and pipe clips – available with infinitely adjustable clamping range or safety lock

starQuick clip

- Snap lock with patented safety system
- Can be lined up together up to size SQ28
- UV- and weatherproof polyamide
- Wall and ceiling mounting

HALOGEN
FREE

M



Quick clip – the high-speed clip

- Extreme loading capacity
- Insertion slopes
- Slot fastening
- Expandable above each other
- Latch-in hole/middle stopper

Multi-Quick clip

- One clip for multiple dimensions
- Universal application
- PG and metric

The OBO Quick series offers three different types of halogen-free pressure and pipe clips for the time-saving and secure fastening of cables and electrical installation pipes. Benefit from shorter mounting times when fastening installations on walls and ceilings, both indoors and outdoors.

All the clip types and sizes of the OBO Quick series can be interconnected easily, thanks to the shared arrangement contour. This means you can mount up to three clips with a single drill hole. The patented shape of the arrangement contour permits a particularly high carrying capacity.




Quick clip

The high-speed clip

- Extreme loading capacity
- Maximum stability
- Extremely easy mounting
- Insertion slopes
- Slot fastening
- Suitable for lining up
- Latch-in hole/middle stopper



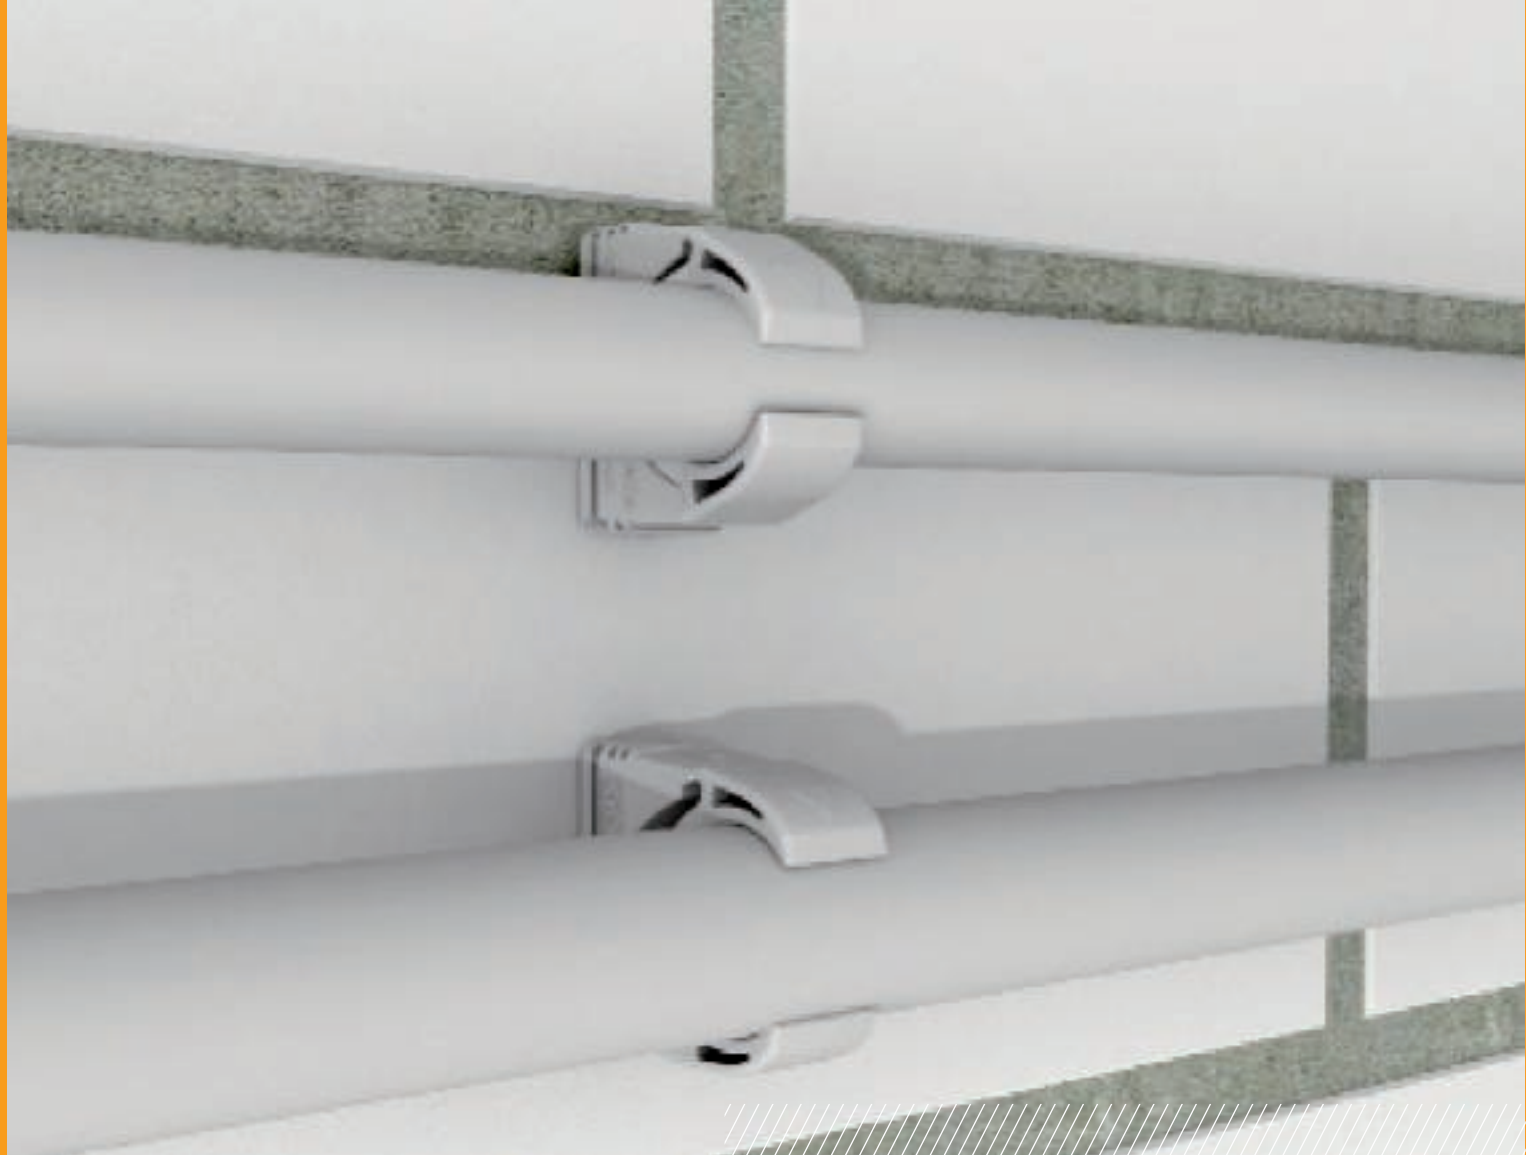

Multi-Quick clip

The universal clamp

- PG and metric
- Easy fastening
- Secure locking
- Radial arrangement
- Simplified storage
- Clamping ranges from 15–37 mm
- Universal application





starQuick clip

The safety clamp

- Snap lock with patented safety system
- All sizes clip together, up to size SQ28
- UV- and weatherproof polyamide
- Wall and ceiling mounting




Quick pipe system

Quick pipe

PVC


IP 44

M

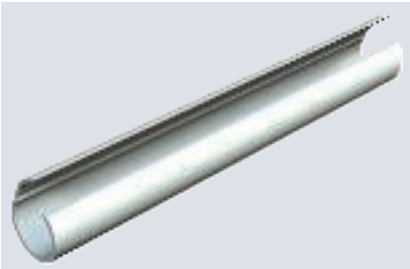

Open plastic Quick pipe pipe for surface-mounted routing of cables in interiors and protected outdoor areas. Mounting on wall and ceiling with Quick clip, starQuick clip and Multi-Quick clip. Toolless closing and opening through turning in the clip. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Colour	Length mm	Dim. t mm	Dim. C mm	Dim. D mm	Dimen- sion M	Pack m	Weight kg/100 m	Item no.
2953 M16 LGR	M16	Light grey	2000	1.2	8.2	15.6	13.2	50	7.000	2153904
2953 M20 LGR	M20	Light grey	2000	1.5	10	20	17	40	11.500	2153912
2953 M25 LGR	M25	Light grey	2000	1.6	13.6	25	21.8	30	16.000	2153920
2953 M32 LGR	M32	Light grey	2000	1.7	17	32	28.6	20	21.500	2153939
2953 M16 RW	M16	Pure white	2000	1.2	8.2	15.6	13.2	50	7.700	2153960
2953 M20 RW	M20	Pure white	2000	1.5	10	20	17	40	11.500	2153963
2953 M25 RW	M25	Pure white	2000	1.6	13.6	25	21.8	30	16.000	2153966
2953 M32 RW	M32	Pure white	2000	1.7	17	32	28.6	20	21.500	2153969

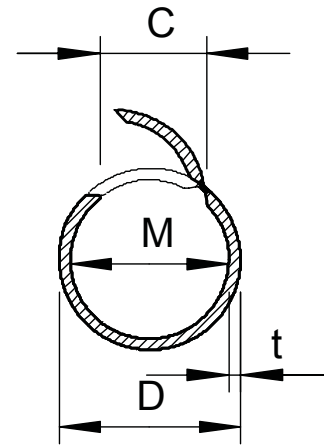

PVC


IP 44

M



Set of Quick clips and Quick pipe pipes


Type	Size	Colour	Set consisting of	Pack Piece	Weight kg/100 pc.	Item no.
2954 M16 LGR	M16	Light grey	50 m Quick pipe and 156x OBO Quick clip	1	444.000	2154501
2954 M20 LGR	M20	Light grey	40 m Quick pipe and 120x OBO Quick clip	1	508.000	2154528
2954 M25 LGR	M25	Light grey	30 m Quick pipe and 96x OBO Quick clip	1	517.000	2154536
2954 M32 LGR	M32	Light grey	20 m Quick pipe and 60x OBO Quick clip	1	479.000	2154544

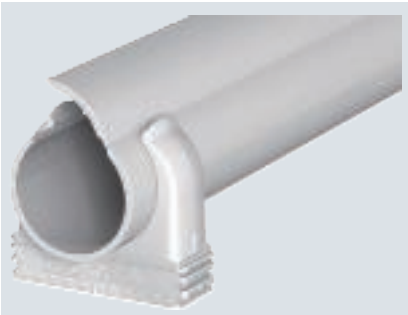

Set consisting of Quick pipe electrical installation pipes and Quick clip surface-mounted clips. For surface-mounted routing of cables in interiors and protected outdoor areas. Universal fastening on wall and ceiling. Comprises 50 m of pipe each of 2 metres in length and 156 Quick clips. Can be used in a temperature range of -25 to +60 °C.

Type	Dimen- sion M	Dim. t mm	Dim. C mm	Dim. D mm
2954 M16 LGR	13,2	1,2	8,2	15,6
2954 M20 LGR	17	1,5	10	20
2954 M25 LGR	21,8	1,6	13,6	25
2954 M32 LGR	28,6	1,7	17	32

Dimensions

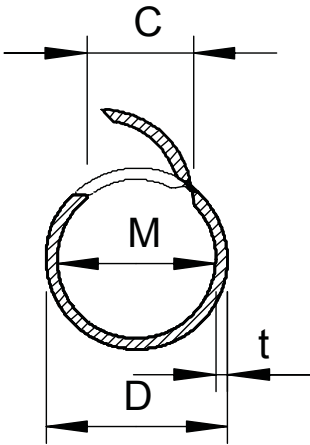


Quick pipe T piece



Fitting for plastic electrical installation pipes to create T branches. Suitable for Quick pipe pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Colour	Dim. L mm	Dim. B mm	Dim. B2 mm	Dim. L1 mm	Dim. d mm	Height mm	Dim. R mm	Pack Piece	Weight kg/100 pc.	Item no.
3000 TMS M16 LGR	M16	Light grey	58	21	94	17	16	18	20	10	0.798	2153839
3000 TMS M20 LGR	M20	Light grey	69	26	110	20	20	23	22	5	1.401	2153841
3000 TMS M25 LGR	M25	Light grey	77	31	123	24	25	28	22	5	1.977	2153843
3000 TMS M32 LGR	M32	Light grey	87	39	135	26	32.6	35	22	5	2.511	2153845
3000 TMS M16 RW	M16	Pure white	58	21	94	17	16	18	20	10	0.798	2153951
3000 TMS M20 RW	M20	Pure white	69	26	110	20	20	23	22	5	1.401	2153953
3000 TMS M25 RW	M25	Pure white	77	31	123	24	25	28	22	5	1.978	2153955
3000 TMS M32 RW	M32	Pure white	87	39	135	26	32.6	35	22	5	2.511	2153957

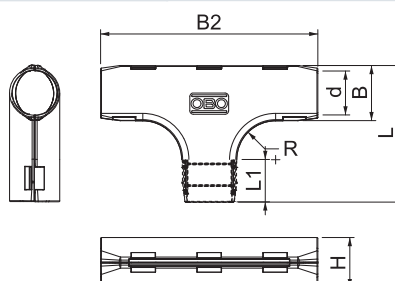


90° Quick pipe bend



Fitting for plastic electrical installation pipes to create 90° bends. Suitable for Quick pipe pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Colour	Dim. B mm	Dim. L mm	Dim. L1 mm	Dim. R mm	Height mm	Dim. d mm	Pack Piece	Weight kg/100 pc.	Item no.
3000 BMS M16 LGR	M16	Light grey	21.4	69	28	20	18	15.6	10	0.592	2154052
3000 BMS M20 LGR	M20	Light grey	26.3	83.2	35	22	23	20	5	1.103	2154054
3000 BMS M25 LGR	M25	Light grey	31.2	91	38	22	28	25	5	1.514	2154056
3000 BMS M32 LGR	M32	Light grey	38.8	103	42	22	35	32.6	5	2.035	2154058
3000 BMS M16 RW	M16	Pure white	21.4	69	28	20	18	15.6	10	0.592	2154062
3000 BMS M20 RW	M20	Pure white	26.3	83.2	35	22	23	20	5	1.103	2154064
3000 BMS M25 RW	M25	Pure white	31.2	91	38	22	28	25	5	1.514	2154066
3000 BMS M32 RW	M32	Pure white	38.8	103	42	22	35	32.6	5	2.035	2154068

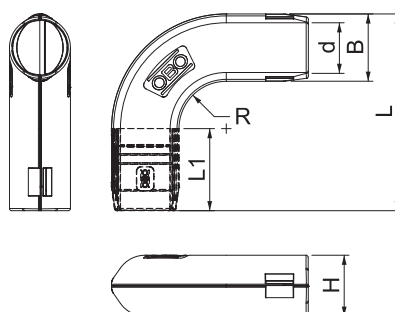

PP

IP 44


M





Quick pipe connection sleeve

Type	Size	Colour	Dim. L mm	Dim. B mm	Dim. L1 mm	Height mm	Dim. d mm	Pack Piece	Weight kg/100 pc.	Item no.
3000 MMS M16 LGR	M16	Light grey	52	21	18	18	15.6	10	0.299	2154081
3000 MMS M20 LGR	M20	Light grey	65	26	23	23	20	10	0.581	2154083
3000 MMS M25 LGR	M25	Light grey	72	31	25	28	25	10	0.823	2154085
3000 MMS M32 LGR	M32	Light grey	80	39	28	35	32.6	10	1.095	2154087
3000 MMS M16 RW	M16	Pure white	52	21	18	18	15.6	10	0.299	2154091
3000 MMS M20 RW	M20	Pure white	65	26	23	23	20	10	0.581	2154093
3000 MMS M25 RW	M25	Pure white	72	31	25	28	25	10	0.823	2154095
3000 MMS M32 RW	M32	Pure white	80	39	28	35	32.6	10	1.095	2154097

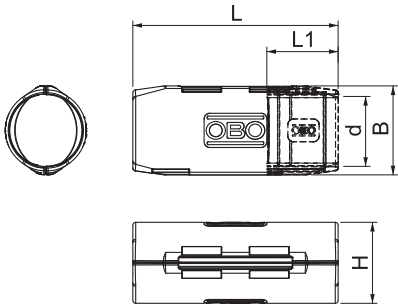

Connection sleeve for plastic electrical installation pipes to create straight connections. Suitable for Quick pipe pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

IP 44

M

Type	Cutting area mm	Pack Piece	Weight kg/100 pc.	Item no.
SQ 1632	16-32	1	40.000	2153572

Quick pipe shears



Shears for burr-free cutting of Quick Wire electrical installation pipe Ø 16–32 mm.

Quick clips


Quick clip



Type	Nominal size	Colour	Shipping box Piece	Pack Piece	Weight kg/100 pc.	Item no.
2955 M16	M16	Light grey	1200	100	0.252	2149004
2955 M20	M20	Light grey	1200	100	0.325	2149010
2955 M25	M25	Light grey	1200	100	0.430	2149016
2955 M32	M32	Light grey	600	50	0.630	2149022
2955 M40	M40	Light grey	600	50	0.835	2149028
2955 M50	M50	Light grey	300	25	1.454	2149034
2955 M63	M63	Light grey	240	20	2.203	2149040

Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Dimensions



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. N mm	Pull-out value
2955 M16	M16	25.3	16	11.5	15.5	7	4.2	25	10	75
2955 M20	M20	30.3	16	14	19.4	9	4.2	29.5	10	90
2955 M25	M25	36.3	16	17.5	24.3	12	4.2	34	10	100
2955 M32	M32	46.3	16	22.4	31.4	12	4.2	42	11	120
2955 M40	M40	57.3	16	26	39.2	11	4.6	51	12	140
2955 M50	M50	70.3	18	32	49	12	6	63	14	165
2955 M63	M63	87.3	20	43	61.5	12	6	74.5	15	230


Quick clip, black



Type	Nominal size	Colour	Pack Piece	Weight kg/100 pc.	Item no.
2955 M16 SW	M16	Jet black	100	0.252	2149559
2955 M20 SW	M20	Jet black	100	0.325	2149563
2955 M25 SW	M25	Jet black	100	0.430	2149567
2955 M32 SW	M32	Jet black	50	0.630	2149571
2955 M40 SW	M40	Jet black	50	0.835	2149575
2955 M50 SW	M50	Jet black	25	1.454	2149579
2955 M63 SW	M63	Jet black	20	2.203	2149583

Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Dimensions



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. N mm	Pull-out value
2955 M16 SW	M16	15	21.5	11.2	15.7	7	4.2	17.6	10	75
2955 M20 SW	M20	30.3	16	14	19.4	9	4.2	29.5	10	90
2955 M25 SW	M25	36.3	16	17.5	24.3	12	4.2	34	10	100
2955 M32 SW	M32	46.3	16	22.4	31.4	12	4.2	42	11	120
2955 M40 SW	M40	57.3	16	26	39.2	11	4.6	51	12	140
2955 M50 SW	M50	70.3	18	32	49	12	6	63	14	165
2955 M63 SW	M63	87.3	20	43	61.5	12	6	74.5	15	230

PP



Quick Clip, flame-resistant, stone grey


Type	Nominal size	Colour	Pack Piece	Weight kg/100 pc.	Item no.
2955 F M16 STGR	M16	Stone grey	100	0.252	2149303
2955 F M20 STGR	M20	Stone grey	100	0.325	2149309
2955 F M25 STGR	M25	Stone grey	100	0.430	2149315
2955 F M32 STGR	M32	Stone grey	50	0.630	2149321
2955 F M40 STGR	M40	Stone grey	50	0.835	2149327
2955 F M50 STGR	M50	Stone grey	25	1.454	2149333
2955 F M63 STGR	M63	Stone grey	20	2.203	2149339

Flame-resistant, flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16–M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. N mm	Pull-out value
2955 F M16 STGR	M16	25.3	16	11.5	15.5	7	4.2	25	10	75
2955 F M20 STGR	M20	30.3	16	14	19.4	9	4.2	29.5	10	90
2955 F M25 STGR	M25	36.3	16	17.5	24.3	12	4.2	34	10	100
2955 F M32 STGR	M32	46.3	16	22.4	31.4	12	4.2	42	11	120
2955 F M40 STGR	M40	57.3	16	26.0	39.2	11	4.6	51	12	140
2955 F M50 STGR	M50	70.3	18	32	49	12	6	63	14	165
2955 F M63 STGR	M63	87.3	20	43	61.5	12	6	74.5	7	230

Dimensions



PP



Quick clip, flame-resistant, pure white


Type	Nominal size	Colour	Pack Piece	Weight kg/100 pc.	Item no.
2955 F M16 RW	M16	Pure white	100	0.252	2149351
2955 F M20 RW	M20	Pure white	100	0.325	2149357
2955 F M25 RW	M25	Pure white	100	0.430	2149363
2955 F M32 RW	M32	Pure white	50	0.630	2149369
2955 F M40 RW	M40	Pure white	50	0.835	2149375

Flame-resistant, flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16–M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.




Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. N mm	Pull-out value
2955 F M16 RW	M16	25.3	16	11.5	15.5	7	4.2	25	10	75
2955 F M20 RW	M20	30.3	16	14	19.4	9	4.2	29.5	10	90
2955 F M25 RW	M25	36.3	16	17.5	24.3	12	4.2	34	10	100
2955 F M32 RW	M32	46.3	16	22.4	31.4	12	4.2	42	11	120
2955 F M40 RW	M40	57.3	16	26.0	39.2	11	4.6	51	12	140

Dimensions



Multi-Quick clips


Multi-Quick clip



Type	Clamping range D mm	Colour	Pack Piece	Weight kg/100 pc.	Item no.
M-Quick 15-19LGR	15-19	Light grey	100	0.545	2153106
M-Quick 18-22LGR	18.5-22.5	Light grey	100	0.760	2153114
M-Quick 25-28LGR	25-28.5	Light grey	50	1.170	2153130
M-Quick 31-37LGR	31-37	Light grey	25	1.780	2153157

Flush-mounted clip to accept metric and PG pipes and Quick pipe electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings and usable in a profile rail, both in indoor and protected outdoor areas. Toolless pipe mounting. Can also be arranged with OBO Quick clip or starQuick clip.

Dimensions



Type	Dim. A mm	Dim. B mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. mm
M-Quick 15-19LGR	27.5	15.5	8	4.1	32	7
M-Quick 18-22LGR	33	15.5	8	4.1	37.5	7
M-Quick 25-28LGR	43	15.5	8	4.1	46	7
M-Quick 31-37LGR	55	15.5	8	4.1	58	7


Multi-Quick clip, metric



Type	Clamping range D mm	Colour	Pack Piece	Weight kg/100 pc.	Item no.
M-Quick M20 LGR	16-20	Light grey	100	0.600	2153718
M-Quick M25 LGR	20-25	Light grey	50	0.930	2153726
M-Quick M32 LGR	25-32	Light grey	50	1.390	2153734

Flush-mounted clip to accept metric pipes and Quick Pipe electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings, both indoors and outdoors. Toolless pipe mounting. Can also be arranged with OBO Quick or starQuick clip.

Dimensions



Type	Dim. A mm	Dim. B mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. mm
M-Quick M20 LGR	27.5	15.5	8	4.1	32	7
M-Quick M25 LGR	33	15.5	8	4.1	37	7
M-Quick M32 LGR	43	15.5	8	4.1	46	7



starQuick clip




Type	Clamping range D mm	Colour	Dim. E mm	Dim. F mm	Dim. mm	Pack Piece	Weight kg/100 pc.	Item no.
SQ-10 LGR	9.5-12	Light grey	10	4.5	10.5	100	0.568	2146053
SQ-12 LGR	11.5-15	Light grey	10	4.5	10.5	100	0.540	2146061
SQ-15 LGR	14-16.5	Light grey	10	4.5	10.5	100	0.584	2146096
SQ-17 LGR	16-20	Light grey	10	4.5	10.5	100	0.640	2146118
SQ-20 LGR	19.5-23.5	Light grey	10	4.5	10.5	50	0.670	2146134
SQ-25 LGR	24-28	Light grey	10	4.5	10.5	50	0.970	2146207
SQ-28 LGR	27.5-32	Light grey	10	4.5	10.5	50	1.070	2146215
SQ-32 LGR	31.2-35.8	Light grey	10	4.5	10.5	50	1.230	2146258
SQ-36 LGR	35-40.1	Light grey	10	4.5	10.5	25	1.510	2146290
SQ-40 LGR	39.3-44.5	Light grey	10	4.5	10.5	25	1.710	2146320
SQ-47 LGR	44-50	Light grey	10	4.5	10.5	25	1.980	2146363
SQ-51 LGR	48-55	Light grey	10	4.5	10.5	15	2.250	2146444
SQ-59 LGR	58.5-65	Light grey	10	4.5	10.5	15	3.300	2146487

Highly stable clip to accept plastic and metal electrical and sanitary pipes, as well as the Quick Pipe electrical installation pipe. Universal fastening options on walls, ceilings and steel structures, both indoors and outdoors. Flexible clamping range of several millimetres. Tool-less pipe mounting. Can be arranged to up to Ø 28 mm, also with OBO Quick starQuick clip. For high load values, can be combined with double bracket. Can be mounted on profile rails for variable spacings and numbers of clips.

Type	Clamping range D mm	Dim. A mm	Dim. B mm	Dim. H mm	Break load kN
SQ-10 LGR	9.5-12	29	17	31.6	0.5
SQ-12 LGR	11.5-15	29	17	34.5	0.55
SQ-15 LGR	14-16.5	29	17	35.7	0.6
SQ-17 LGR	16-20	29	17	39.8	0.7
SQ-20 LGR	19.5-23.5	29	17	43.5	0.8
SQ-25 LGR	24-28	40	17	49.5	0.85
SQ-28 LGR	27.5-32	40	17	52.8	0.9
SQ-32 LGR	31.2-35.8	43	17	57.3	1
SQ-36 LGR	35-40.1	47	17	65.8	1.1
SQ-40 LGR	39.3-44.5	52	17	69.5	1.2
SQ-47 LGR	44-50	57	17	75.5	1.2
SQ-51 LGR	48-55	63	17	81	1.4
SQ-59 LGR	58.5-65	74	20	94.3	1.5

Dimensions



starQuick clip, black




Type	Nominal size	Clamping range D mm	Break load kN	Colour	Dim. E mm	Dim. F mm	Dim. mm	Pack Piece	Weight kg/100 pc.	Item no.
SQ-20 SW	20-23	19.5-23.5	0.8	Jet black	10	4.5	10.5	50	0.848	2146164

Cable brackets for isCon® conductors for mounting on the building structure. Can also be used in the first 1.5 m. Can be arranged next to each other. Made from a UV and weather-resistant polyamide.



Type	Clamping range D mm	Dim. A mm	Dim. B mm	Dim. H mm	Break load kN
SQ-20 SW	19.5-23.5	29	17	43.5	0.8

Dimensions






starQuick nut



Type	Nominal size	Dim. A mm	Dim. L mm	Dim. t mm	Dim. mm	Colour	Pack Piece	Weight kg/100 pc.	Item no.
SQ M6	M6	17	15	5	4	Light grey	100	0.070	2146509

Nut for insertion in starQuick clip, to mount the clip on an M6 thread.

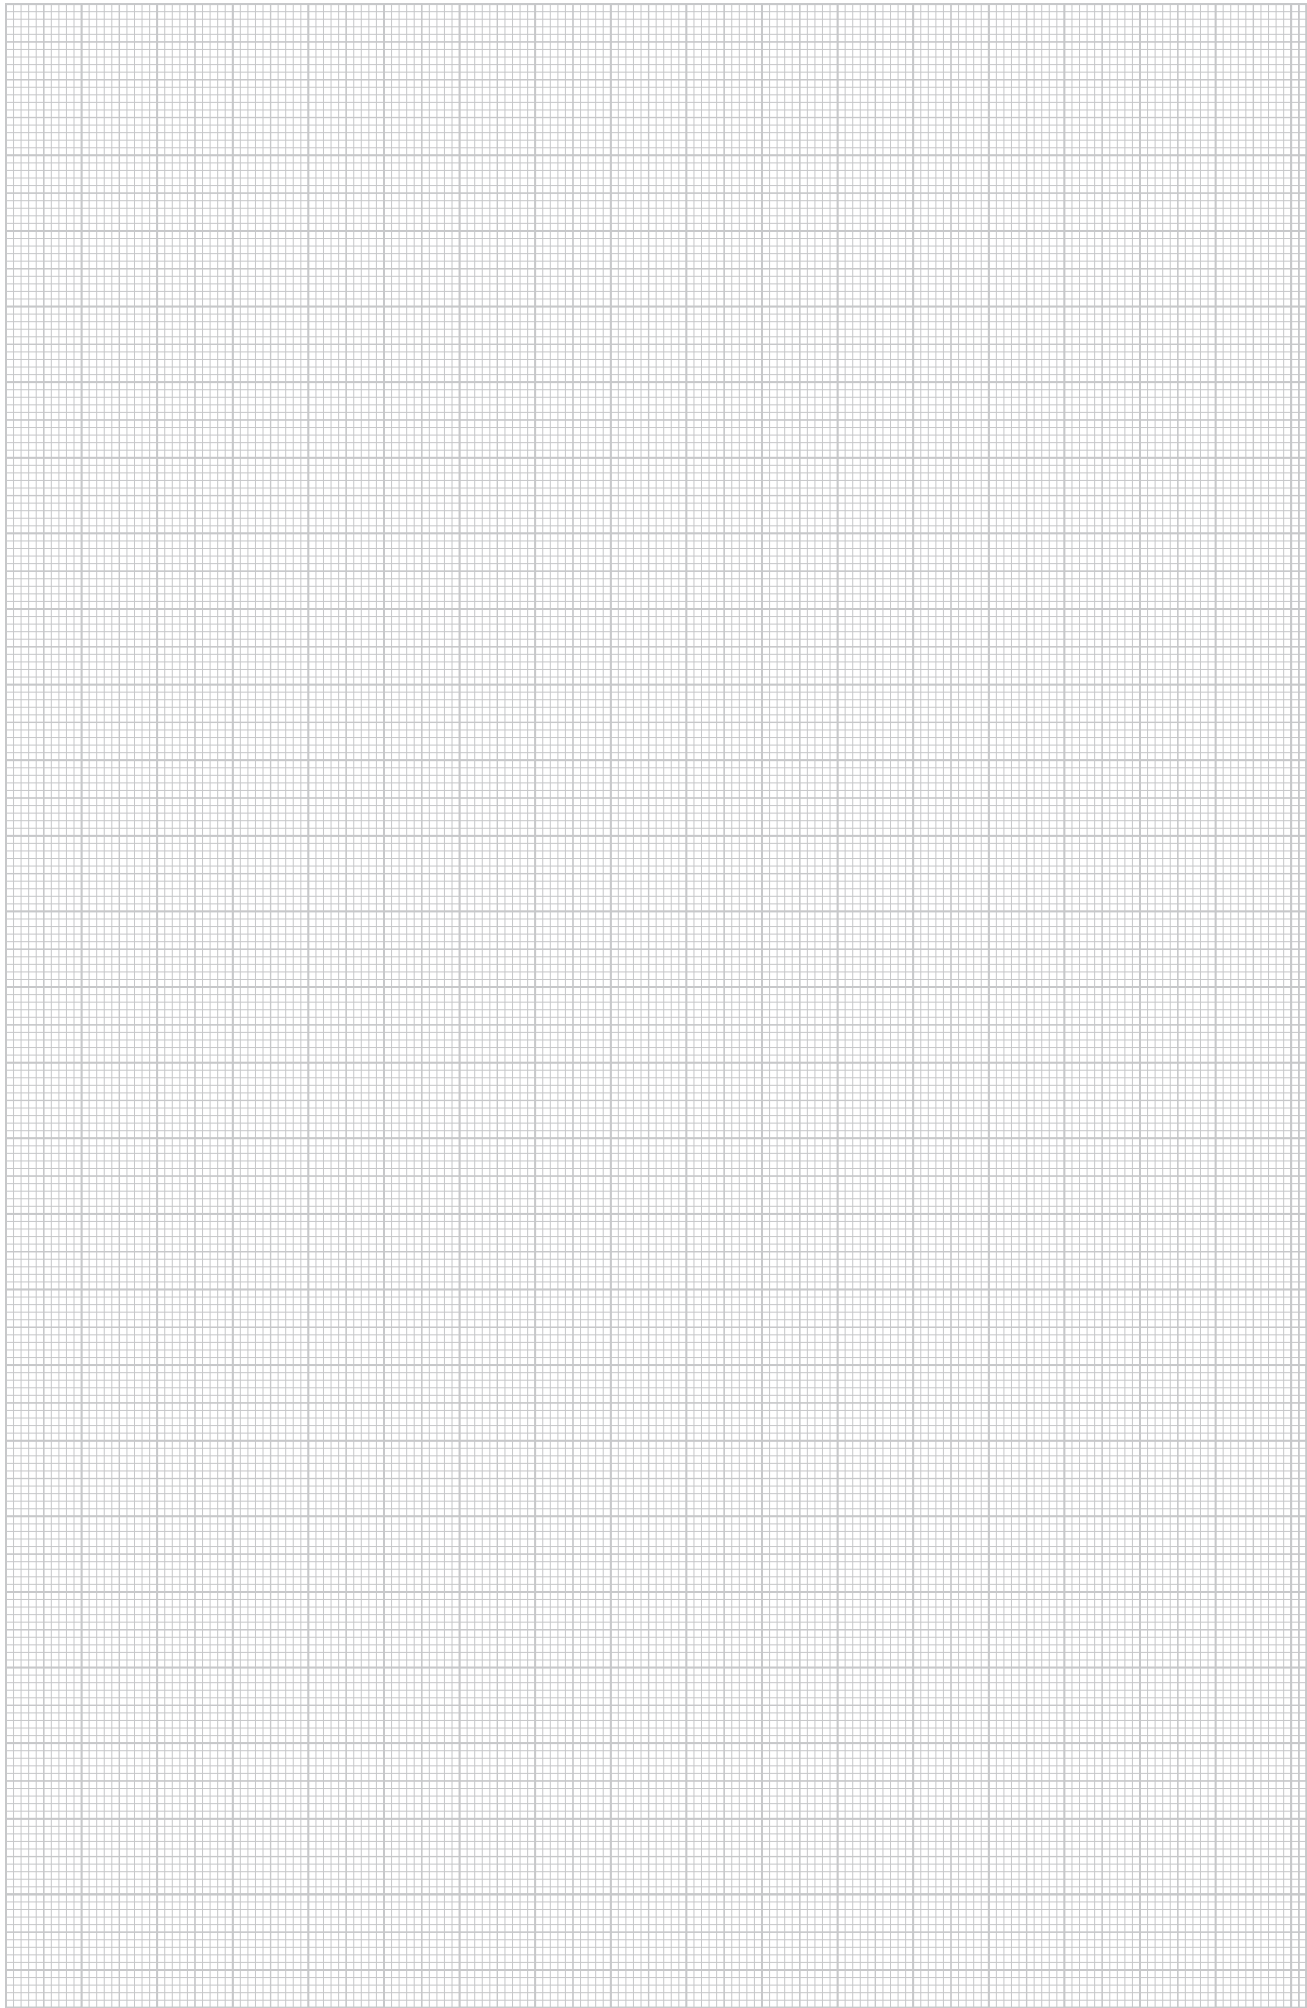

OBO Bettermann Holding GmbH & Co. KG

Postfach 1120
D-58694 Menden

Customer Service

Tel.: +49 23 73 89 - 17 00
Fax: +49 23 73 89 - 12 38
export@obo.de

www.obo-bettermann.com

Building Connections

