



Surface-mounting RJ 45 socket for LCS6⁶ - Category 6

Cat. No(s) : 860 44/47/52/54
861 44/47/52/54




CONTENTS	Page
1. General characteristics	1
2. Presentation	1
3. Mounting	1
4. Technical characteristics.....	1
5. Installation rules.....	2
6. Overall dimensions	2
7. Raccordement usuel.....	2-3
8. Performance	2-3
9. Standards and approvals.....	3

1. GENERAL CHARACTERISTICS


RJ 45 socket, category 6.
For high data rate transmissions (Ethernet Gigabit).

	UTP	FTP
	AL 51	AL 52
	860 44	860 47
	860 52	860 54
	861 44	861 47
	861 52	861 54

2. PRESENTATION

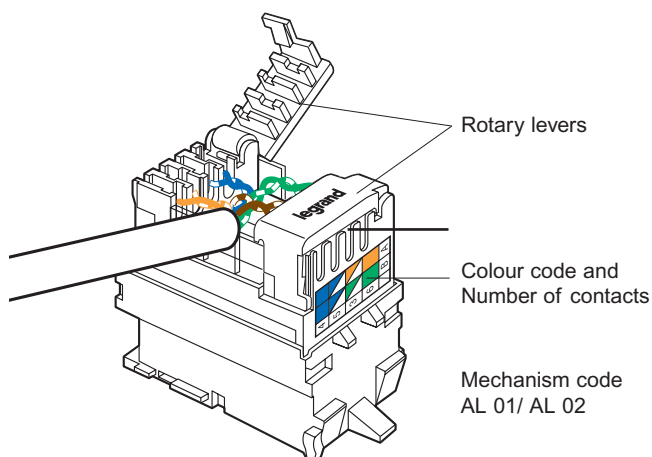

3. MOUNTING

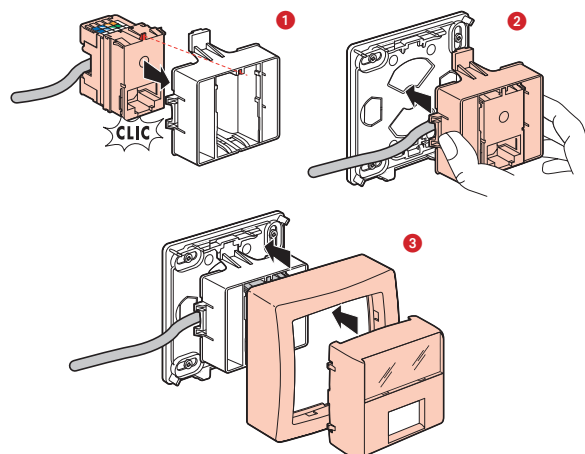

4. TECHNICAL CHARACTERISTICS

Contacts: gold/nickel, gold thickness > 1.27 µm.

Metal parts : bronze (CuSn5).

Insulating module : ABS - polycarbonate.

Cover plate : polycarbonate RAL 9010.

RJ 45 connectors equipped with rotary levers not requiring specific tool and enabling re-cabling in case of error.

Double colour code EIA - TIA 568 A and B on terminals

- UTP 8 contacts

- FTP 9 contacts

Permissible conductors :

- Single-strand : 0.5-0.65 mm, AWG 24-22

- Polyethylene conductor insulator : max Ø on insulator 1.5 mm.

Number of wires to be connected per connection : 1

Max number of connections and disconnections :

5 including 2 without refreshing the wire.

Breakdown voltage ≥ 1000 V.

Contact resistance ≤ 20 mΩ.

Insulation resistance ≥ 500 mΩ at 100 V DC.

Operating temperatures : - 40 °C to + 70 °C

6-day wet heat cycle.

Resistance to gas (H₂S and SO₂).

Endurance : 2500 operations (plugging in/unplugging).


Accepte les fiches :

RJ 11 (4 contacts), RJ 12 (6 contacts), RJ 45 (9 contacts).

Surface-mounting RJ 45 socket for LCS6⁶ - Category 6


Cat. No(s) : 860 44/47/52/54
861 44/47/52/54

5. INSTALLATION RULES

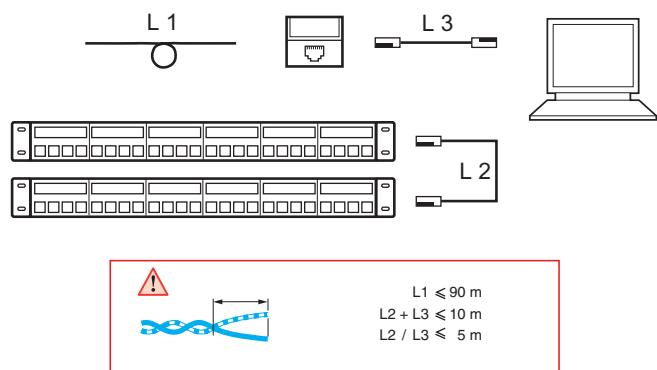


6. OVERALL DIMENSIONS


Complete

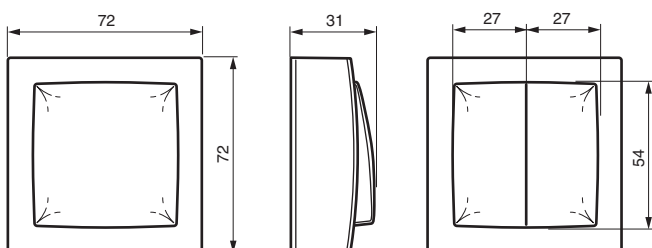


Configurable

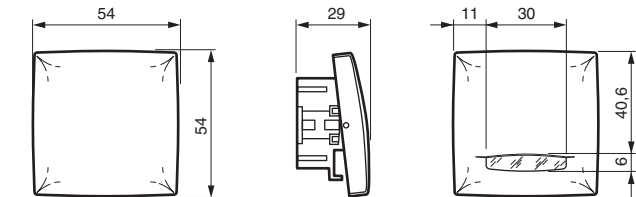

7. RJ 45 STANDARD CONNECTION

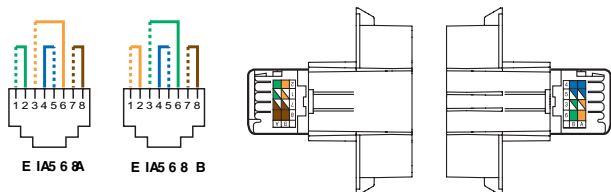


8. PERFORMANCES

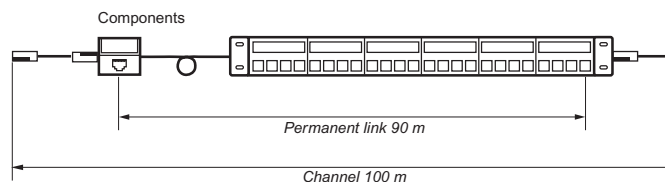


8.1 Component performance (RJ 45 connectors)


UTP - NEXT

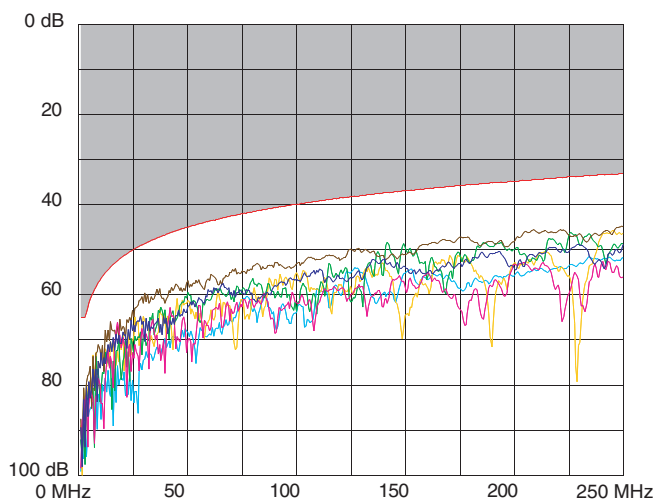

UTP - ACR

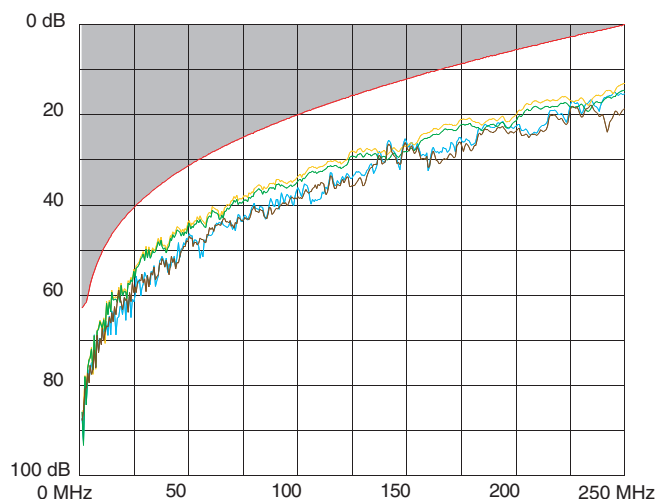

UTP - RETURN LOSS

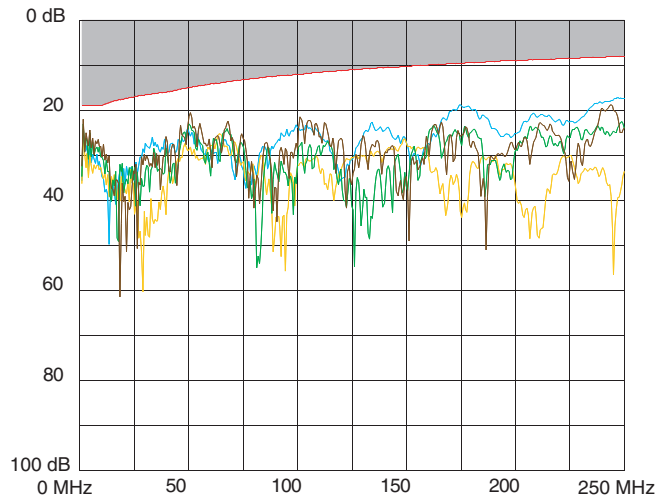


Surface-mounting RJ 45 socket for LCS6⁶ - Category 6

Cat. No(s) : 860 44/47/52/54
861 44/47/52/54


8. PERFORMANCES (continued)

8.1 Component performance (RJ 45 connectors) (continued)


FTP - NEXT

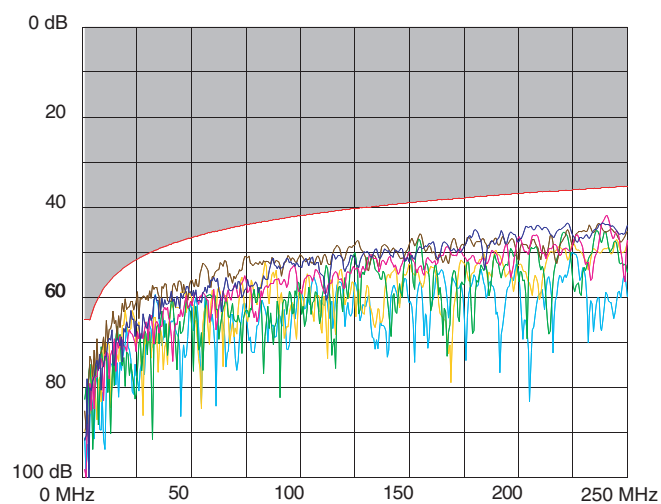

FTP - ACR

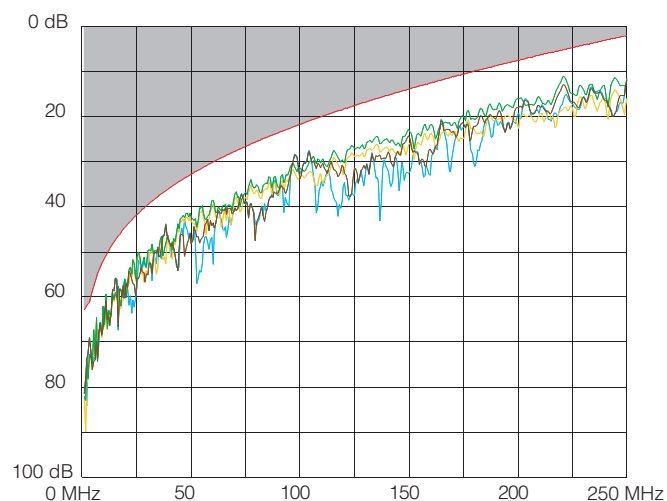

FTP - RETURN LOSS

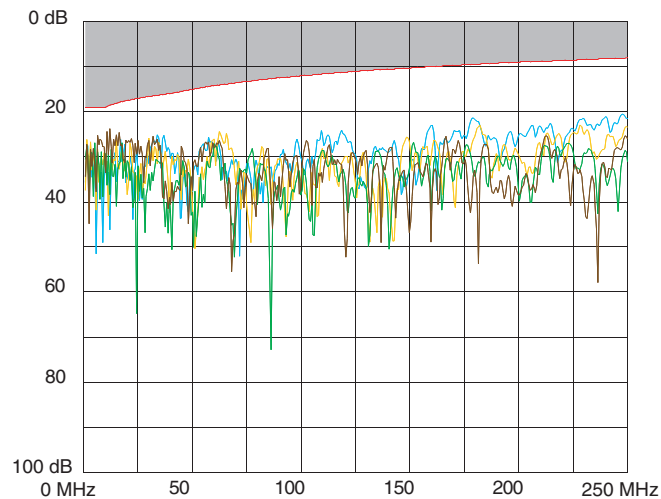

9. STANDARDS AND APPROVALS

Conform with the following standards

ISO 11 801 Second edition

EN 50 173 Second edition

EIA/TIA - 568 - B.2

NFC 20 730

Standard 8877 - 603.7

Approval No. 3P : 102 180