



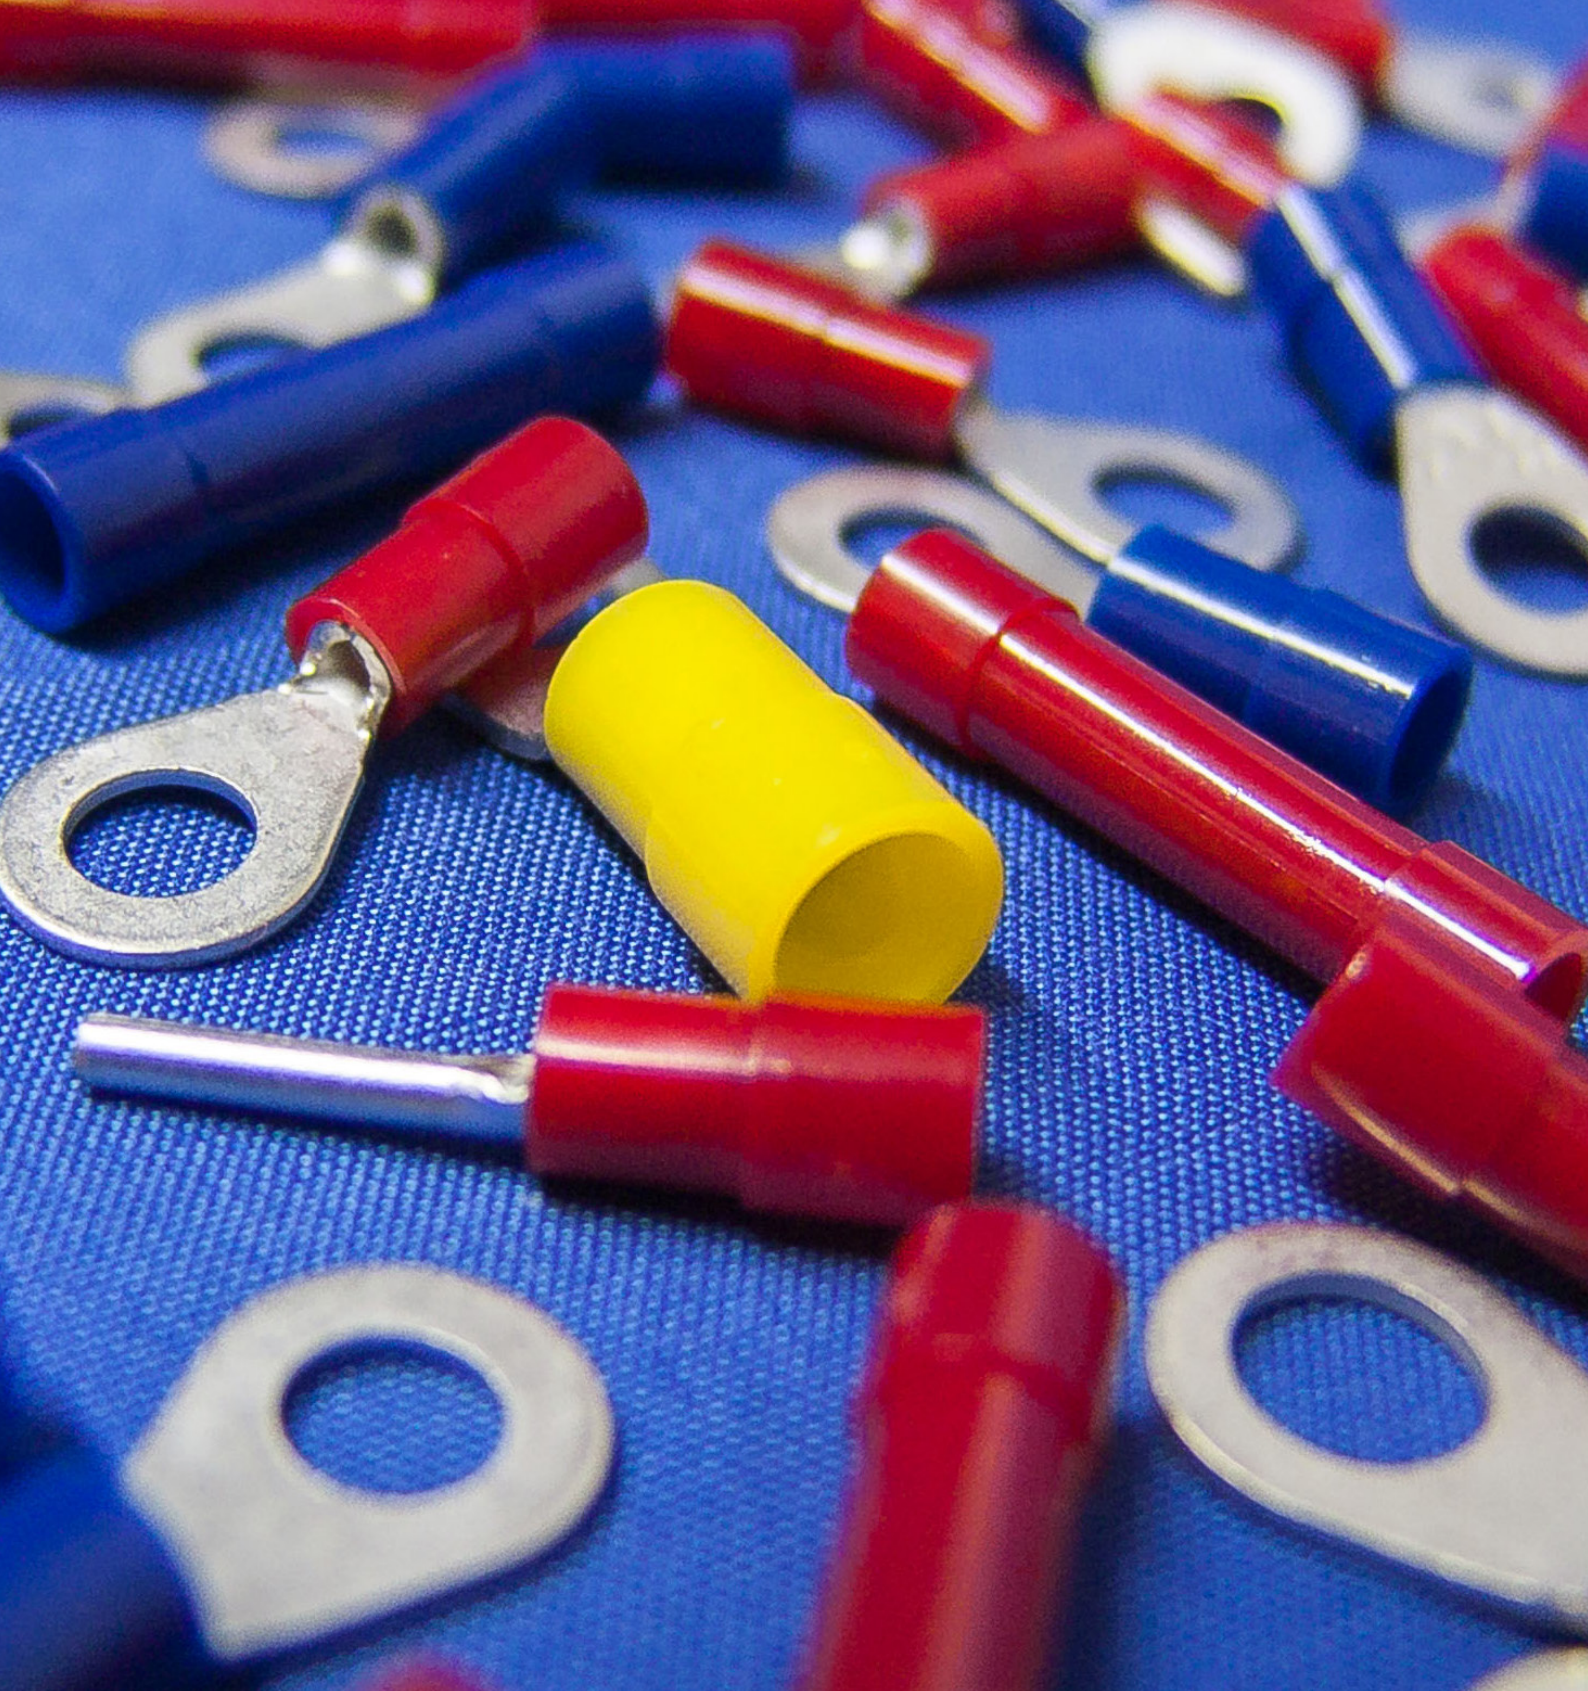

INSULATED TERMINALS

intercable

PC

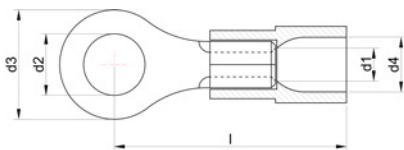

Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
600V max.
T 125°C max.

DIN 46237
(exc.: *)



mm ²	Ø mm	Art. N.		mm					Pack
				d1	d4	d2	d3	l	
0,1-0,5	2	ICIQ052 *	●	1	2,3	2,2	5	14,0	100
	3	ICIQ053 *	●			3,2	5	14,0	100
	4	ICIQ054 *	●			4,3	6,5	16,0	100
	5	ICIQ055 *	●			5,3	8	16,0	100
0,5-1	2	ICIQ12	●	1,6	4	2,2	6	17,0	100
	3	ICIQ13	●			3,2	6	17,0	100
	3,5	ICIQ135	●			3,7	6	17,0	100
	4	ICIQ14	●			4,3	8	18,0	100
	4	ICIQ14S	●			4,3	7	17,5	100
	5	ICIQ15	●			5,3	10	19,0	100
	5	ICIQ15S	●			5,3	8	18,5	100
	6	ICIQ16 *	●			6,5	10	19,0	100
	8	ICIQ18 *	●			8,4	14	23,0	100
	10	ICIQ110 *	●			10,5	18	25,0	100
1,5-2,5	3	ICIQ23	●	2,3	4,4	3,2	6	17,0	100
	3,5	ICIQ235	●			3,7	6	17,0	100
	4	ICIQ24	●			4,3	8	18,0	100
	4	ICIQ24S	●			4,3	6,8	17,6	100
	5	ICIQ25	●			5,3	10	20,0	100
	5	ICIQ25S	●			5,3	8	19,5	100
	6	ICIQ26	●			6,5	11	22,0	100
	8	ICIQ28	●			8,4	14	23,0	100
	10	ICIQ210 *	●			10,5	18	25,6	100
	12	ICIQ212 *	●			13,0	18	26,0	100
4-6	4	ICIQ64	●	3,6	6,4	4,3	8	21,0	100
	5	ICIQ65	●			5,3	10	22,0	100
	6	ICIQ66	●			6,5	11	23,0	100
	8	ICIQ68	●			8,4	14	26,0	100
	10	ICIQ610	●			10,5	18	28,0	100
	12	ICIQ612	●			13,0	18	28,0	100

typically used tools: „GENERAL CATALOG TOOLS“




6 - 16 mm² page: 136



series 60, 130: 10 mm²≤..page: 141, 144

PC




Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
T 120°C max.

DIN 46234
pipe 10 - 150 mm²



mm ²	Ø mm	Art. N.		mm					kg (/100)	Pack
				d1	d4	d2	d3	l		
10	5	ICIQ105	●	4,5	8	5,3	10	24,5	0,23	50
	6	ICIQ106	●			6,5	11	25,5	0,24	50
	8	ICIQ108	●			8,4	14	28,5	0,30	50
	10	ICIQ1010	●			10,5	18	29,5	0,35	50
16	5	ICIQ165	●	5,8	10,5	5,3	11	31,5	0,40	50
	6	ICIQ166	●			6,5	11	31,5	0,38	50
	8	ICIQ168	●			8,4	14	33,5	0,43	50
	10	ICIQ1610	●			10,5	18	35,5	0,50	50
25	5	ICIQ255	●	7,5	13	5,3	12	38	0,71	50
	6	ICIQ256	●			6,5	12	38	0,69	50
	8	ICIQ258	●			8,4	16	38	0,76	50
	10	ICIQ2510	●			10,5	18	39	0,79	50
	12	ICIQ2512	●			13	22	44	0,97	50
35	6	ICIQ356	●	9	14,5	6,5	15	41	0,97	50
	8	ICIQ358	●			8,4	16	41	0,97	50
	10	ICIQ3510	●			10,5	18	42	1,01	50
	12	ICIQ3512	●			13	22	46	1,17	50
50	6	ICIQ506	●	11	16,5	6,5	18	47,5	1,76	50
	8	ICIQ508	●			8,4	18	47,5	1,71	50
	10	ICIQ5010	●			10,5	18	47,5	1,74	50
	12	ICIQ5012	●			13	22	49,5	1,80	50
70	6	ICIQ706	●	13	18,7	6,5	22	51	2,58	50
	8	ICIQ708	●			8,4	22	51	2,63	50
	10	ICIQ7010	●			10,5	22	51	2,55	50
	12	ICIQ7012	●			13	22	51	2,58	50
	16	ICIQ7016	●			17	28	55	2,68	50
95	8	ICIQ958	●	15	21,7	8,4	24	57,5	4,09	50
	10	ICIQ9510	●			10,5	24	57,5	4,22	50
	12	ICIQ9512	●			13	24	57,5	3,92	50
	16	ICIQ9516	●			17	28	59,5	3,94	50
120	8	ICIQ1208	●	16,5	24,2	8,4	24	62	5,63	25
	10	ICIQ12010	●			10,5	24	62	5,56	25
	12	ICIQ12012	●			13	24	62	5,33	25
	16	ICIQ12016	●			17	28	66	5,67	25
150	10	ICIQ15010	●	19	27,2	10,5	30	70	8,02	25
	12	ICIQ15012	●			13	30	70	7,84	25
	16	ICIQ15016	●			17	30	70	7,56	25

PC

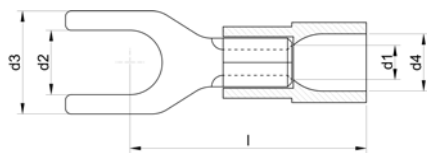


Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
600V max.
T 125°C max.

DIN 46237
(exc.: *)



mm ²	Ø mm	Art. N.		mm					Pack
				d1	d4	d2	d3	l	
0,5-1	3	ICIQ13G	●	1,6	4,0	3,2	6,0	17,0	100
	3,5	ICIQ135G	●			3,7	6,0	17,0	100
	4	ICIQ14G	●			4,3	8,0	18,1	100
	4	ICIQ14GS	●			4,3	6,8	18,0	100
	5	ICIQ15G	●			5,3	10,0	19,0	100
	6	ICIQ16G *	●			6,5	11,0	21,0	100
1,5-2,5	3	ICIQ23G	●	2,3	4,5	3,2	5,5	19,0	100
	3,5	ICIQ235G	●			3,7	6,0	17,0	100
	4	ICIQ24G	●			4,3	8,0	18,0	100
	4	ICIQ24GS	●			4,3	6,8	18,7	100
	5	ICIQ25G	●			5,3	10,0	20,0	100
	6	ICIQ26G	●			6,5	11,0	22,0	100
4-6	4	ICIQ64G	●	3,6	6,4	4,3	8,0	21,0	100
	5	ICIQ65G	●			5,3	10,0	22,0	100
	6	ICIG66G	●			6,5	11,0	23,0	100
	8	ICIQ68G	●			8,4	14,0	26,0	100
	10	ICIQ610G	●			10,5	18,0	28,0	100
10	5	ICIQ105G	●	4,5	8,0	5,3	10,5	24,1	50
	6	ICIQ106G	●			6,5	10,8	24,6	50
16	6	ICIQ166G	●	5,8	11,0	6,5	11,0	32,2	50
	8	ICIQ168G	●			8,4	13,8	32,2	50

PC



Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
600V max.
T 125°C max.


DIN 46231



mm ²	Art. N.		mm					Pack
			d1	d4	d3	l1	l2	
0,1-0,5	ICIQ05ST *	●	1,0	2,2	1,2	18,0	9,0	100
0,5-1	ICIQ1ST	●	1,7	4,0	1,9	22,8	12,0	100
1,5-2,5	ICIQ2ST	●	2,3	4,5	1,9	22,8	12,0	100
	ICIQ2STL	●	2,3	4,5	1,9	27,0	16,0	100
4-6	ICIQ6ST	●	3,6	6,4	2,8	27,0	11,0	100
10	ICIQ10ST	●	4,5	7,8	2,4x4,3	34,0	12,0	50
16	ICIQ16ST	●	5,8	9,1	2,5x5,6	40,7	13,5	50
25	ICIQ25ST	●	7,0	12,4	2,5x6,9	44,0	16,0	50
35	ICIQ35ST	●	8,4	14,0	3,2x8,1	52,5	20,0	50

typically used tools: „GENERAL CATALOG TOOLS“  6 - 16 mm² page: 136


PVC



Cu-ETP 99,9%, Sn / Copper tinned
PVC
T 70°C max.

mm ²	Art.N.			mm				kg (/100)	Pack
				mm1	mm2	l1	l2		
0,1-0,5	ICIQ0525FH	●		2,8	0,5	16	6,4	0,04	100
	ICIQ0528FH	●		2,8	0,8	16	6,4	0,04	100
0,5-1	ICIQ125FH	●		2,8	0,5	19	6,5	0,08	100
	ICIQ128FH	●		2,8	0,8	19	6,5	0,08	100
	ICIQ145FH	●		4,8	0,5	19,4	6,4	0,09	100
	ICIQ148FH	●		4,8	0,8	19,4	6,4	0,09	100
	ICIQ168FH	●		6,3	0,8	20,8	7,5	0,11	100
1,5-2,5	ICIQ225FH	●		2,8	0,5	19	6,5	0,08	100
	ICIQ228FH	●		2,8	0,8	19	6,5	0,08	100
	ICIQ245FH	●		4,8	0,5	19,4	6,4	0,10	100
	ICIQ248FH	●		4,8	0,8	19,4	6,4	0,10	100
	ICIQ268FH	●		6,3	0,8	20,8	7,3	0,12	100
4-6	ICIQ668FH	●		6,3	0,8	23,3	7,3	0,18	100
	ICIQ6912FH	●		9,5	1,2	28,6	12	0,26	100

FULL PA / PC




Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
300V max.
T 125°C max.



mm ²	Art.N.			mm			Pack
	PA	PC		mm	l1	l2	
0,5-1	ICIQ125FHVI	ICIQ125FHVIPC	●	2,8x0,5	19,2	6,4	100
	ICIQ128FHVI	ICIQ128FHVIPC	●	2,8x0,8	19,2	6,4	100
	ICIQ145FHVI	ICIQ145FHVIPC	●	4,8x0,5	20,2	6,4	100
	ICIQ148FHVI	ICIQ148FHVIPC	●	4,8x0,8	20,2	6,4	100
	ICIQ168FHVI	ICIQ168FHVIPC	●	6,3x0,8	21,5	7,3	100
1,5-2,5	ICIQ245FHVI	ICIQ245FHVIPC	●	4,8x0,5	20,2	6,5	100
	ICIQ248FHVI	ICIQ248FHVIPC	●	4,8x0,8	20,2	6,5	100
	ICIQ268FHVI	ICIQ268FHVIPC	●	6,3x0,8	21,5	7,3	100
4-6	ICIQ668FHVI	ICIQ668FHVIPC	●	6,3x0,8	24,2	7,3	100

PA




CuSn / Zinnbronze
PA
T 100°C max.

mm ²	Art.N.		mm				kg (/100)	Pack
			mm1	mm2	l1	l2		
0,5-1	ICIQ125FHB	●	2,8	0,5	18,4	6,4	0,06	100
	ICIQ128FHB	●	2,8	0,8	18,4	6,4	0,06	100
	ICIQ148FHB	●	4,8	0,8	19	6,2	0,08	100
	ICIQ168FHB	●	6,3	0,8	21	8	0,10	100
1,5-2,5	ICIQ268FHB	●	6,3	0,8	21	8	0,11	100
4-6	ICIQ668FHB	●	6,3	0,8	24,7	8	0,15	100

typically used tools: „GENERAL CATALOG TOOLS” 6 - 16 mm² page: 136

PA




Brass, Sn / tinned
PA6.6 / Poliamide insulation
300V max.
T 105°C max.



mm ²	Art.N.		mm			Pack
			mm	l1	l2	
0,5-1,5	ICIQ168WFHVI	●	6,3x0,8	16,3	15,0	100
1,5-2,5	ICIQ268WFHVI	●	6,3x0,8	16,8	15,0	100

typically used tools: „GENERAL CATALOG TOOLS” page: 130

PVC




Cu-ETP 99,9%, Sn / Copper tinned
PVC
T 70°C max.

mm ²	Art.N.		mm					kg (/100)	Pack
			mm1	mm2	l1	l2	l3		
0,5-1	ICIQ1FHA	●	6,3	0,8	23,9	8	8,2	0,15	100
1,5-2,5	ICIQ2FHA	●	6,3	0,8	23	8	8,2	0,16	100
4-6	ICIQ6FHA	●	6,3	0,8	25	8	8,2	0,18	100

typically used tools: „GENERAL CATALOG TOOLS” 6 - 16 mm² page: 136


PVC



Cu-ETP 99,9%, Sn / Copper tinned
PVC
T 70°C max.

mm ²	Art.N.		mm				kg (/100)	Pack
			mm1	mm2	l1	l2		
0,5-1	ICIQ128FS	●	2,8	0,8	19,2	6,5	0,08	100
	ICIQ148FS	●	4,8	0,8	19,8	6,7	0,09	100
	ICIQ168FS	●	6,3	0,8	21,8	7,7	0,10	100
1,5-2,5	ICIQ248FS	●	4,8	0,8	19,8	6,7	0,09	100
	ICIQ268FS	●	6,3	0,8	21,8	7,7	0,11	100
4-6	ICIQ668FS	●	6,3	0,8	24	7,7	0,18	100

PC




Cu-ETP 99,9%, Sn / Copper tinned
PC / Polycarbonate insulation
300V max.
T 125°C max.



mm ²	Art.N.		mm			Pack
			mm	l1	l2	
0,5-1,5	ICIQ128FSPC	●	2,8x0,8	19,2	6,5	100
	ICIQ148FSPC	●	4,8x0,8	19,8	6,7	100
	ICIQ168FSPC	●	6,3x0,8	21,8	7,7	100
1,5-2,5	ICIQ248FSPC	●	4,8x0,8	19,8	6,7	100
	ICIQ268FSPC	●	6,3x0,8	21,8	7,7	100
4-6	ICIQ668FSPC	●	6,3x0,8	24,0	7,7	100

PA




Cu-ETP 99,9%, Sn / Copper tinned
PA 6.6 / Poliamide insulation
300V max.
T 105°C max.



mm ²	Art.N.	Colour	mm				Pack
			d1	d4	l1	l2	
0,5-1,5	ICIQ1EV	Transparent	2,3	6,0	15,2	8,8	100
1,5-2,5	ICIQ2EV	Blue-transparent	2,3	6,4	15,4	8,0	100
4-6	ICIQ6EV	Yellow-transparent	3,4	9,2	17,7	8,5	100
10	ICIQ10EV	Transparent	5,0	11,8	22,0	8,0	50

PVC




Brass, Sn / tinned
PVC
300V max.
T 75°C max.



mm ²	Art.N.		mm		Pack
			Ø	l1	
0,5-1,5	ICIQ1RSH	●	4	23,3	100
1,5-2,5	ICIQ2RSH	●	5	23,3	100
4-6	ICIQ6RSH	●	5	25,1	100

PVC / PC




Brass, Sn / tinned
PVC
300V max.
T 75°C max.



mm ²	Art.N.			mm			Pack
	PVC	PC		Ø	l1	l2	
0,5-1,5	ICIQ1RST	ICIQ1RSTPC	●	4	21,5	8,5	100
1,5-2,5	ICIQ2RST	ICIQ2RSTPC	●	5	21,2	8,5	100
4-6	ICIQ6RST	ICIQ6RSTPC	●	5	24,0	8,5	100

PA




Brass, Sn / tinned
PA 6.6 / Poliamide insulation
300V max.
T 105°C max.



mm ²	Art.N.		mm		Pack
			Ø	l1	
0,5-1,5	ICIQ1RSHVI	●	4	25,2	100
1,5-2,5	ICIQ2RSHVI	●	4	25,2	100

PA




Brass, Sn / tinned
PA 6.6 / Poliamide insulation
300V max.
T 105°C max.



mm ²	Art.N.		mm		Pack
			Ø	l1	
0,5-1,5	ICIQ1RSTVI	●	4	27,0	100
1,5-2,5	ICIQ2RSTVI	●	4	27,0	100

INSULATED TERMINALS

PC


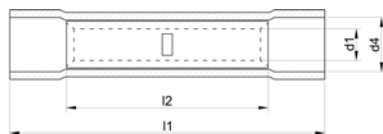


Cu-ETP 99,9%, Sn / Copper tinned
PC
300V max.
T 120°C max.



mm ²	Art.N.		mm				Pack
			d1	d4	l1	l2	
0,1-0,5	ICIQ05V	●	1,2	2,0	20,0	12,0	100
0,5-1	ICIQ1V	●	1,6	4,1	25,0	15,0	100
1,5-2,5	ICIQ2V	●	2,3	4,5	26,0	15,0	100
4-6	ICIQ6V	●	3,6	6,4	27,0	15,0	100

PA

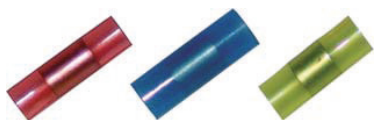


Cu-ETP 99,9%, Sn / Copper tinned
PA 6.6 / Poliamide insulation
300V max.
T 105°C max.



mm ²	Art.N.		mm				Pack
			d1	d4	l1	l2	
0,1-0,5	ICIQ05PV	●	1,2	2,0	12,0	5,0	100
0,5-1	ICIQ1PV	●	1,7	3,2	17,0	7,0	100
1,5-2,5	ICIQ2PV	●	2,3	4,0	17,0	7,0	100
4-6	ICIQ6PV	●	3,6	5,4	21,2	7,0	100

PE (thermo)



Cu-ETP 99,9%, Sn / Copper tinned
PE / Polietilene HD
300V max.
T -10 - 105°C max.



mm ²	Art.N.		mm				Pack
			d1	d4	l1	l2	
0,1-0,5	ICIQ05WSV	●	1,4	3,1	24,5	11,5	100
0,5-1	ICIQ1WSV	●	1,7	4,4	36,0	15,0	100
1,5-2,5	ICIQ2WSV	●	2,3	5,2	36,0	15,0	100
4-6	ICIQ6WSV	●	3,6	6,5	41,0	15,0	100