



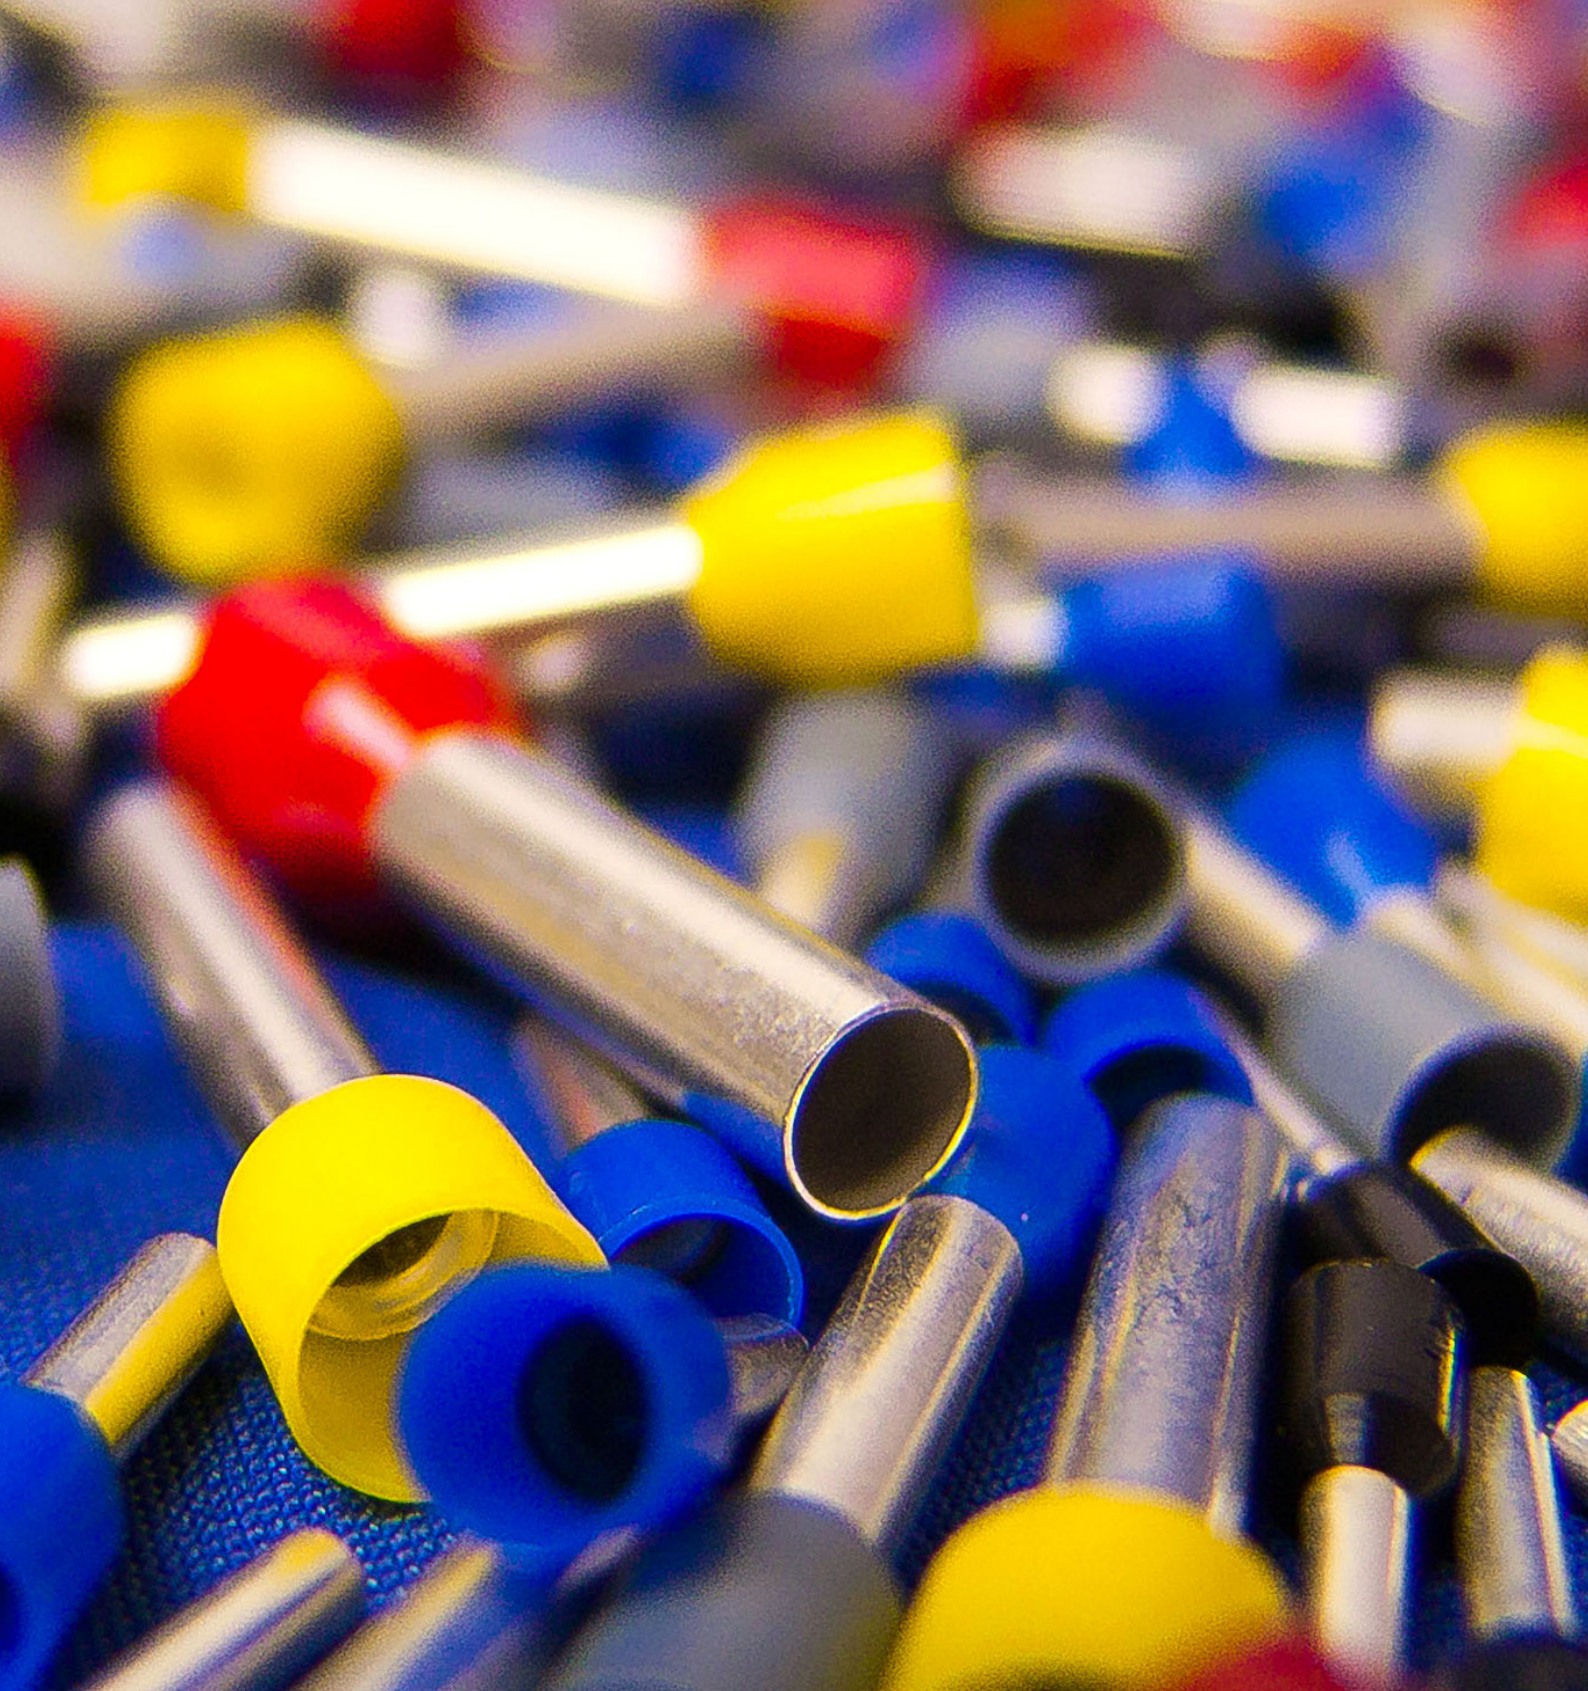

END-SLEEVES

intercable

END-SLEEVES

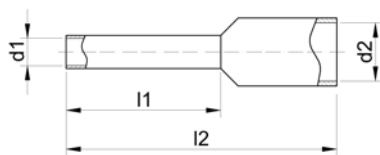

Cu-ETP 99,9%, Sn / Copper tinned
PP (Polipropilene insulation)
T 105°C max.
Halogen Free



file n.: 268879


mm ²	Color 1 Art. N.	Color 2 Art. N.	DIN 46228/4 Art. N.	d1	d2	l2	l1	Pack
0,14	● ICIAE0146	● ICIAE0146BR		0,7	1,6	10	6	100
	● ICIAE0148	● ICIAE0148BR		0,7	1,6	12	8	100
0,25	● ICIAE0256	● ICIAE0256HGE		0,75	1,8	10	6	100
	● ICIAE0258	● ICIAE0258HGE		0,75	1,8	12	8	100
0,34	● ICIAE0346	● ICIAE0346HGRÜ		0,8	2,0	10	6	100
	● ICIAE0348	● ICIAE0348HGRÜ		0,8	2,0	12	8	100
0,5	● ICIAE056OR	● ICIAE056	● ICIAE056	1,0	2,6	12	6	100
	● ICIAE058OR	● ICIAE058	● ICIAE058	1,0	2,6	14	8	100
	● ICIAE0510OR	● ICIAE0510	● ICIAE0510	1,0	2,6	16	10	100
0,75	● ICIAE0756WE	● ICIAE0756BL	● ICIAE07506	1,2	2,8	12	6	100
	● ICIAE0758WE	● ICIAE0758BL	● ICIAE07508	1,2	2,8	14	8	100
	● ICIAE07510WE	● ICIAE07510BL	● ICIAE07510	1,2	2,8	16	10	100
	● ICIAE07512WE	● ICIAE07512BL	● ICIAE07512	1,2	2,8	18	12	100
1	● ICIAE16GE	● ICIAE16	● ICIAE16	1,4	3,0	12	6	100
	● ICIAE18GE	● ICIAE18	● ICIAE18	1,4	3,0	14	8	100
	● ICIAE110GE	● ICIAE110	● ICIAE110	1,4	3,0	16	10	100
	● ICIAE112GE	● ICIAE112	● ICIAE112	1,4	3,0	18	12	100
1,5	● ICIAE158RO	● ICIAE158	● ICIAE158	1,7	3,5	14	8	100
	● ICIAE1510RO	● ICIAE1510	● ICIAE1510	1,7	3,5	16	10	100
	● ICIAE1512RO	● ICIAE1512	● ICIAE1512	1,7	3,5	18	12	100
	● ICIAE1518RO	● ICIAE1518	● ICIAE1518	1,7	3,5	24	18	100
2,5	● ICIAE28	● ICIAE28GR	● ICIAE28	2,2	4,2	14	8	100
	● ICIAE212	● ICIAE212GR	● ICIAE212	2,2	4,2	18	12	100
	● ICIAE218	● ICIAE218GR	● ICIAE218	2,2	4,2	24	18	100
4	● ICIAE410	● ICIAE410OR	● ICIAE410	2,8	4,8	17	10	100
	● ICIAE412	● ICIAE412OR	● ICIAE412	2,8	4,8	20	12	100
	● ICIAE418	● ICIAE418OR	● ICIAE418	2,8	4,8	26	18	100
6	● ICIAE612SCH	● ICIAE612GRÜ	● ICIAE612	3,5	6,3	20	12	100
	● ICIAE618SCH	● ICIAE618GRÜ	● ICIAE618	3,5	6,3	26	18	100
10	● ICIAE1012ELF	● ICIAE1012BR	● ICIAE1012	4,5	7,6	22	12	100
	● ICIAE1018ELF	● ICIAE1018BR	● ICIAE1018	4,5	7,6	28	18	100
16	● ICIAE1612GRÜ	● ICIAE1612ELF	● ICIAE1612	5,8	8,8	24	12	100
	● ICIAE1618GRÜ	● ICIAE1618ELF	● ICIAE1618	5,8	8,8	28	18	100
25	● ICIAE2516BR	● ICIAE2516SCH	● ICIAE2516	7,3	11,2	30	16	50
	● ICIAE2518BR	● ICIAE2518SCH	● ICIAE2518	7,3	11,2	32	18	50
	● ICIAE2522BR	● ICIAE2522SCH	● ICIAE2522	7,3	11,2	36	22	50
35	● ICIAE3516BE		● ICIAE3516	8,3	12,7	30	16	50
	● ICIAE3518BE		● ICIAE3518	8,3	12,7	32	18	50
	● ICIAE3525BE		● ICIAE3525	8,3	12,7	39	25	50
50	● ICIAE5020OL		● ICIAE5020	10,3	15,0	36	20	50
	● ICIAE5025OL		● ICIAE5025	10,3	15,0	40	25	50
70	● ICIAE7021			13,5	16,0	37	21	25
95	● ICIAE9525			14,5	18,0	44	25	25
120	● ICIAE12027			16,5	20,0	48	27	10
150	● ICIAE15032			19,5	23,0	58	32	10



Cu-ETP 99,9%, Sn / Copper tinned
PP (Polipropilene insulation)
T 105°C max.
Halogen Free

mm ²	l mm	Color	Art. N.	mm				kg (/1000)	Pack
				l1	l2	d1	d2		
1,5	8	●	ICIAE158K	17,5	8	1,8	7,5	0,08	100
	10	●	ICIAE1510K	19,5	10			0,10	100
2,5	8	●	ICIAE28K	17,5	8	2,3	8	0,09	100
	12	●	ICIAE212K	21,5	12			0,14	100
4	10	●	ICIAE410K	19,5	10	2,9	9,5	0,18	100
6	12	●	ICIAE612K	23	12	3,6	10	0,28	100
10	12	●	ICIAE1012K	24	12	4,6	11,5	0,39	100
16	12	●	ICIAE1612K	25,5	12	6	13,5	0,50	100

2 x



Cu-ETP 99,9%, Sn / Copper tinned
PP (Polipropilene insulation)
T 105°C max.
Halogen Free



mm ²		Color 1 Art. N.		Color 2 Art. N.		DIN 46228/4 Art. N.		d1	d2	d3	l2	l1	Pack
2 x	0,25	●	ICIAE0258Z					1,15	1,8	3,4	15	8	100
2 x	0,34	●	ICIAE0348Z					1,15	1,8	3,4	15	8	100
2 x	0,5	●	ICIAE058ZOR	●	ICIAE058Z	●	ICIAE058Z	1,4	2,5	4,7	15	8	100
2 x	0,75	●	ICIAE0756ZWE	●	ICIAE0756ZBL	●	ICIAE0756Z	1,8	2,8	5	13	6	100
		●	ICIAE0758ZWE	●	ICIAE0758ZBL	●	ICIAE0758Z	1,8	2,8	5	15	8	100
		●	ICIAE07510ZWE	●	ICIAE07510ZBL	●	ICIAE07510Z	1,8	2,8	5	17	10	100
2 x	1	●	ICIAE16ZGE	●	ICIAE16Z	●	ICIAE16Z	2	3,4	5,4	13	6	100
		●	ICIAE18ZGE	●	ICIAE18Z	●	ICIAE18Z	2	3,4	5,4	15	8	100
		●	ICIAE110ZGE	●	ICIAE110Z	●	ICIAE110Z	2	3,4	5,4	17	10	100
		●	ICIAE118ZGE	●	ICIAE118Z	●	ICIAE118Z	2	3,4	5,4	25	18	100
2 x	1,5	●	ICIAE158ZRO	●	ICIAE158Z	●	ICIAE158Z	2,3	3,6	6,6	16	8	100
		●	ICIAE1512ZRO	●	ICIAE1512Z	●	ICIAE1512Z	2,3	3,6	6,6	20	12	100
		●	ICIAE1518ZRO	●	ICIAE1518Z	●	ICIAE1518Z	2,3	3,6	6,6	26	18	100
2 x	2,5	●	ICIAE210Z	●	ICIAE210ZGR	●	ICIAE210Z	2,9	4,2	7,8	18,5	10	100
		●	ICIAE213Z	●	ICIAE213ZGR	●	ICIAE213Z	2,9	4,2	7,8	21,5	13	100
2 x	4	●	ICIAE412Z	●	ICIAE412ZOR	●	ICIAE412Z	3,7	4,9	8,8	23	12	100
2 x	6	●	ICIAE614ZSCH	●	ICIAE614ZGRÜ	●	ICIAE614Z	4,8	6,9	10	26	14	100
2 x	10	●	ICIAE1014ZELF	●	ICIAE1014ZBR	●	ICIAE1014Z	6,4	7,2	13	26	14	100
2 x	16	●	ICIAE1614ZGRÜ	●	ICIAE1614ZELF	●	ICIAE1614Z	8,2	9,6	18,4	30	14	50


typically used tools: „GENERAL CATALOG TOOLS“



0,08 - 95 mm² page: 133-135



series 45, 50, 60, 130: 10 mm² ≤ .. page: 139-141, 144



Cu-ETP 99,9%, Sn / Copper tinned (DIN EN 13600)

DIN 46228 p. 1.
(exc.: *)

code T... :




mm ²	Art. N.	mm			kg (/1000)	Pack
		l1	d1	d2		
0,14	ICAE0147	7	0,65		0,03	500
0,25	ICAE0255*	5	0,75		0,03	500
	ICAE0257*	7			0,04	500
0,34	ICAE0345*	5	0,85		0,03	500
	ICAE0347*	7			0,04	500
0,5	ICAE056	6	1,1	2,1	0,04	500
	ICAE058*	8			0,05	500
	ICAE0510	10			0,06	500
0,75	ICAE0756	6	1,3	2,3	0,04	500
	ICAE0758	8			0,05	500
	ICAE07510	10			0,07	500
1	ICAE16	6	1,5	2,5	0,05	500
	ICAE18*	8			0,06	500
	ICAE110	10			0,08	500
1,5	ICAE157	7	1,9	2,8	0,07	500
	ICAE1510	10			0,10	500
	ICAE1512	12			0,11	500
	ICAE1515*	15			0,15	500
2,5	ICAE27	7	2,3	3,4	0,08	500
	ICAE210	10			0,10	500
	ICAE212	12			0,14	500
	ICAE215*	15			0,18	500
	ICAE218	18			0,21	500
4	ICAE49	9	2,9	4,0	0,17	100
	ICAE412	12			0,22	100
	ICAE418	18			0,34	100
6	ICAE610	10	3,5	4,7	0,23	100
	ICAE612	12			0,28	100
	ICAE618	18			0,41	100

typically used tools: „GENERAL CATALOG TOOLS“



page: 133-135



Cu-ETP 99,9%, Sn / Copper tinned (DIN EN 13600)

DIN 46228 p. 1.
(exc.: *)

code T... :



mm ²	Art. N.	mm			kg (/1000)	Pack
		l1	d1	d2		
10	ICAE1010*	10	4,6	5,8	0,30	100
	ICAE1012	12			0,39	100
	ICAE1015	15			0,45	100
	ICAE1018	18			0,58	100
16	ICAE1612	12	6	7,5	0,50	100
	ICAE1615	15			0,56	100
	ICAE1618	18			0,74	100
	ICAE1625	25			1,00	100
25	ICAE2512*	12	7,5	9,5	0,61	50
	ICAE2515	15			0,93	50
	ICAE2518	18			0,93	50
	ICAE2525	25			1,26	50
35	ICAE3518	18	8,5	11,0	1,04	50
	ICAE3525	25			1,38	50
50	ICAE5018	18	10,5		1,94	50
	ICAE5022*	22			2,31	50
	ICAE5025	25			2,59	50
	ICAE5032	32			3,02	50
70	ICAE7025*	25	12,7		3,68	25
	ICAE7032*	32			4,85	25
95	ICAE9525*	25	14,7		4,24	25
	ICAE9532*	32			5,30	25
120	ICAE12032*	32	16,7		7,87	10
	ICAE12040*	40			10,11	10
150	ICAE15032*	32	18,7		8,89	10
	ICAE15040*	40			10,70	10
185	ICAE18540*	40	20,2		14,37	10
240	ICAE24034*	34	23,1		13,04	10
	ICAE24040*	40			15,34	10



typically used tools: „GENERAL CATALOG TOOLS“



0,08 - 95 mm² page: 133-135




series 45, 50, 60, 130: 10 mm² ≤ .. page: 139-141, 144

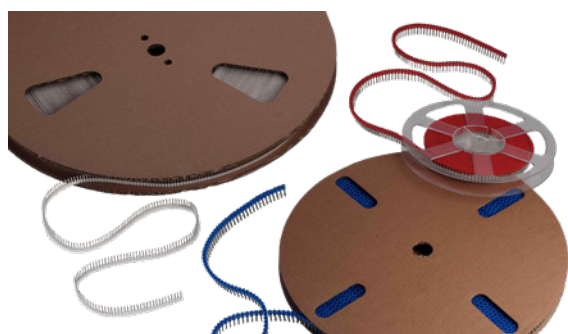

Cu-ETP 99,9%, Sn / Copper tinned
PP (Polipropilene insulation)
T 105°C max.
Halogen Free



mm ²	Color	Art. N. Reel Ø 18 cm	Qty / Reel	Art. N. Reel Ø 32 cm	Qty / Reel	Art. N. Reel Ø 45 cm	Qty / Reel	d1	d2	l1	l2
0,5	●	TPD0508BL	1.000	TPD0508BM	4.000	TPD0508BL	10.000	1,0	2,6	14,0	8,0
0,75	●	TPD7508BL	1.000	TPD7508BM	4.000	TPD7508BL	10.000	1,2	2,8	14,0	8,0
1	●	TPD0108BL	800	TPD0108BM	3.500	TPD0108BL	7.500	1,4	3,0	14,0	8,0
1,5	●	TPD1508BL	800	TPD1508BM	3.500	TPD1508BL	7.500	1,7	3,5	14,0	8,0
2,5	●	TPD2508BL	500	TPD2508BM	2.500	TPD2508BL	5.000	2,2	4,2	14,0	8,0

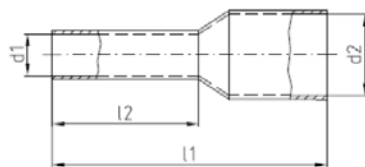

Cu-ETP 99,9%, Sn / Copper tinned
PP (Polipropilene insulation)
T 105°C max.
Halogen Free
DIN 46228 p. 4.



mm ²	l mm	Color DIN Art. N.	Color 1 Art. N.	mm				kg (/1000)	Pack
				l1	l2	d1	d2		
0,5	8	● ICIAE058STF	● ICIAE058ORSTF	14	8	1	2,6	0,05	500
0,75	8	● ICIAE0758STF	● ICIAE0758WESTF	14	8	1,2	2,8	0,05	500
1	8	● ICIAE18STF	● ICIAE18GESTF	14	8	1,4	3	0,06	500
1,5	8	● ICIAE158STF	● ICIAE158ROSTF	14	8	1,7	3,5	0,08	500
2,5	8	● ICIAE28STF	● ICIAE28STF	14	8	2,2	4,2	0,09	500